

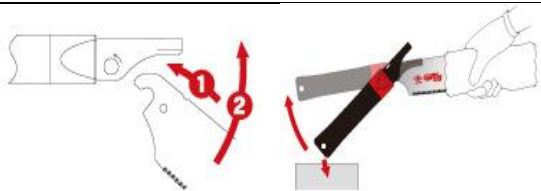


50237 HANDY UTILITY H-200

DESCRIPTION	Designed for intricate and precise rip/cross/slant cutting of lumber, ply wood, and other Man made boards in confined spaces.		
	SPECIFICATION		
	BLADE LENGTH	200 mm	
	PITCH	1.75 mm	
	TPI	14	
	BLADE THICKNESS	0.50 mm	
	KERF	0.70 mm	

FEATURES	
<ul style="list-style-type: none"> Tapered fore blade for access in tight spaces. Impulse Hardened high quality sharp teeth designed for long-lasting performance. Interchangeable blade is much more economical than built-in style. 	<ul style="list-style-type: none"> Sturdy and precisely ground universal teeth suitable for rip/cross/slant cutting leaving an incredibly clean-cut surface. Electroless nickel-phosphorus plated saw blade for rust prevention. Easy blade replacement with one simple tap.

RECOMMENDED HANDLE (GROUP D)		
Straight H-150		Code 50369 Length 150 mm
Alternative handles (group D)		
Straight H-300 (aluminium)		Code
Straight H-300 wood		
Puff handle		
H-146LH pistol-grip		Code 50324 Length 146 mm

<p>Detaching the blade</p> 	<ul style="list-style-type: none"> Wrap the handle in a rag or towel for safety. Tap the handle end with the saw teeth facing upward to loosen the blade. Pull the blade out of the spine.
<p>Attaching the blade</p> 	<ul style="list-style-type: none"> Wrap the handle in a rag or towel for safety. Insert the blade into the spine, and hook onto the pivot. Squeeze the blade into the gap of the spine as a temporary lock. Tap the handle end gently with the saw teeth facing downward to fix the blade firmly.



In Japan users are encouraged to carry this saw as shown on the left: perhaps not such a good idea anywhere with strict laws on bladed weapons in public.