

### S-145 flush cut (double-edged)

Designed mainly for trimming dowels and tenons, but also usable for general detail work. A video showing how useful it is can be seen at [www.woodworkprojects.co.uk/Unique\\_mini\\_demo.wmv](http://www.woodworkprojects.co.uk/Unique_mini_demo.wmv)



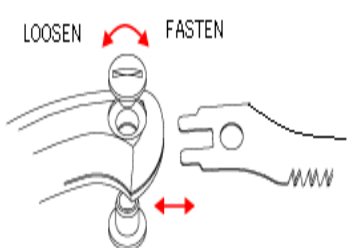
#### SPECIFICATION

PITCH	BLADE LENGTH	BLADE THICKNESS & KERF
1.5/1.2mm (17/21TPI)	150mm	0.4mm

#### FEATURES

- High quality sharp teeth (impulse hardened) are designed for long-lasting great performance.
- Interchangeable blade style saves your money.
- No set on the flexible blade: great for trimming dowels, pegs, wedges etc without marring the surface of the workpiece.
- Nickel-plated saw blade for rust prevention.

#### REPLACEMENT OF SAW BLADE

Detaching blade	Attaching blade
	<ul style="list-style-type: none"><li>● Loosen the screw with coin or screwdriver, and pull the blade out from the handle.</li><li>● Insert the blade, and screw to fix the blade firmly.</li><li>● Check the screw and fixed position of saw blade</li></ul>

#### CAUTION:

Since the saw teeth are very sharp, we recommend that you wear gloves or wrap the blade with something (a cloth or towel or its cardboard sleeve) when replacing the blade.